

WHOLE HOUSE CUSTOMIZATION

Flooring



Quantex Building Systems

Go Down No. 1, Udyog Nagar, Nemawar Road, Palda, Indore (MP)



4 +917314022951

✓ 13//31-022331

✓ contact@quantex.in

QUALITY AND CERTIFICATIONS





















Stone Plastic Composite PVC Flooring

UNDERLAYMENT

Floor padding is important for better flooring installation and its benefits include

- Sound Reduction
- Moister Proof
- Pressure Resistant
- Smooth imperfactions in sub-floor




It has a series of characteristics such as flexibility, lightweight, rapid pressure-sensitive fixing, easy to use, free bending, ultra-thin volume, reliable performance and so on.

Cork Packing

Comfortable and soft underfoot, it is an environment-friendly and natural elastic material with sound insulation and shock absorption.
















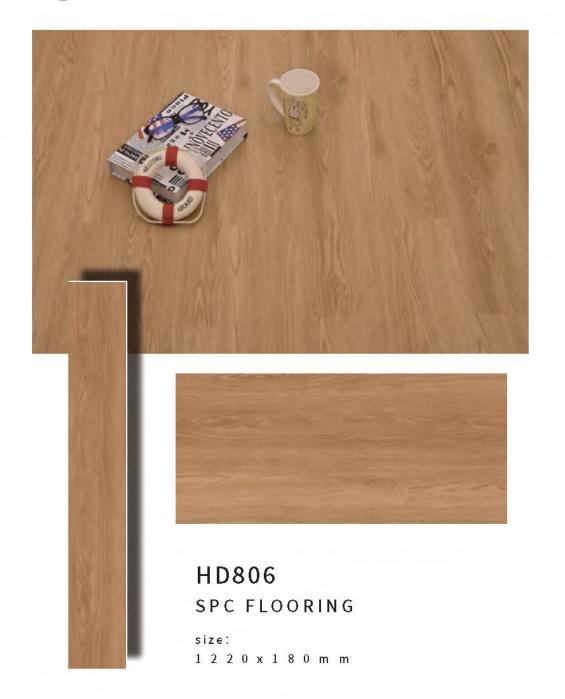





SPC FLOORING

1 2 2 0 x 1 8 0 m m

size:









HD811 SPC FLOORING


size:



HD812 SPC FLOORING

size: 1 2 2 0 x 1 8 0 m m




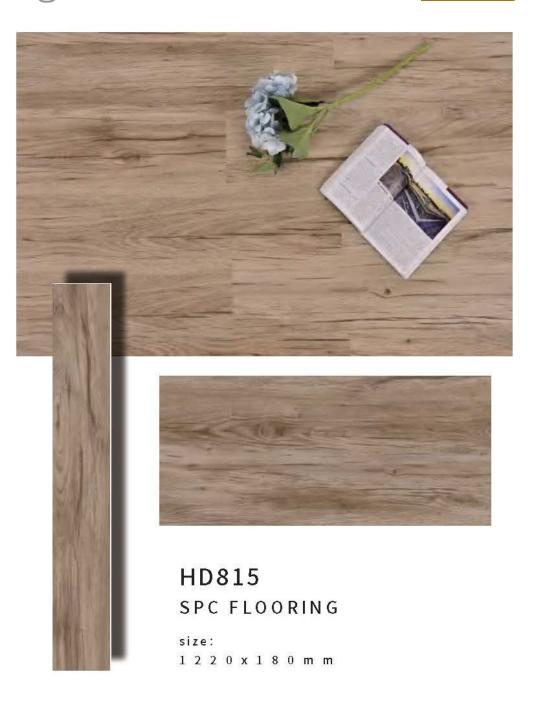







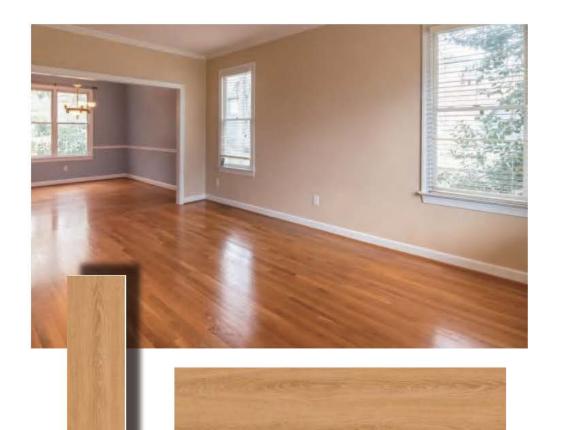

HD821 SPC FLOORING

size: 1 2 2 0 x 1 8 0 m m

Stone Plastic Composite PVC Flooring



PVC VINYL FLOORING

STONE

























Stone Plastic Composite PVC Flooring














PVC STONE VINYL FLOORING

size: 4 5 7 . 2 x 4 5 7 . 2 m m thickness: 2 . 0 / 2 . 5 / 3 . 0 m m

Outdoor PVC Decking

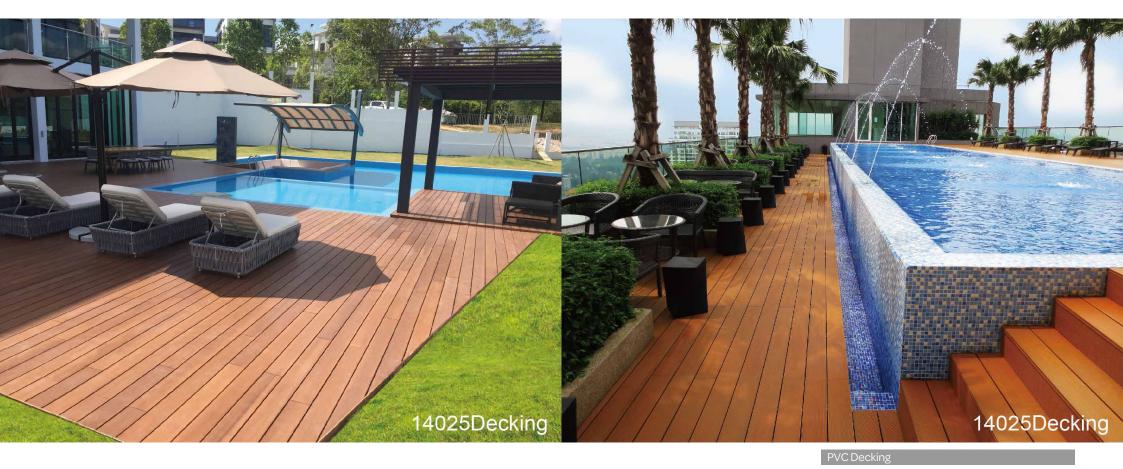

Decking support K-2



140D2A1



140D2A2



140D2A3





140D2A4

7210 Fascia DK7210 Galvanized Tube LG4020

14025 Decking

Covering width : 0.14m Standard Length : 2.2m

140D2A

14025 Steel Decking




Weight : 3.05kg/m Covering width : 0.14m Standard Length : 2.2m



Covering width: 0.14m Standard Length: 2.2m



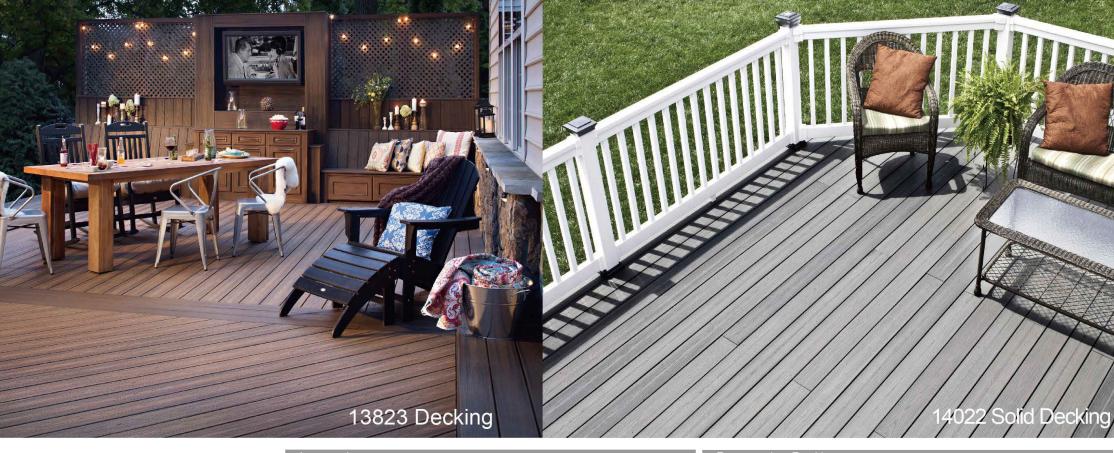













Finland Wood



Gold Sandal Wood



Old Wood

W-PE Colours



Teak







Light Gray

Co-extrusion Colours



CE-2





CE-4

CE-5

W-PVC DIY



DIY2AB

Weight

: 1.05kg/pcs : 300x300mm

W-PE DIY



PE-DK300

: 1.35kg/pcs : 300x300mm

Co-extrusion DIY



Weight

CO-DK300


: 1.35kg/pcs : 300x300mm




Regular specifications: 803*127*12mm (custom) 803*127*15mm (stock) 1210*194*12mm (custom) 1210*194*15mm (custom)




Regular specifications: 803*127*12mm (custom) 803*127*15mm (stock) 1210*194*12mm (custom) 1210*194*15mm (stock)




Regular specifications: 805*126*12mm (stock) 805*126*15mm (custom) 1210*194*12mm (custom) 1210*194*15mm (custom)

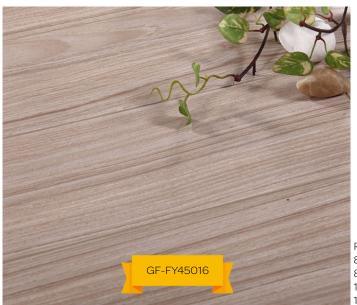

Regular specifications: 803*127*12mm (in stock) 803*127*15mm (in stock) 1210*194*12mm (customized) 1210*194*15mm (customized)

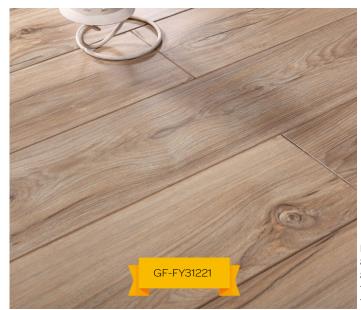

Regular specifications: 803*127*12mm (in stock) 803*127*15mm (in stock) 1210*194*12mm (customized) 1210*194*15mm (in stock)

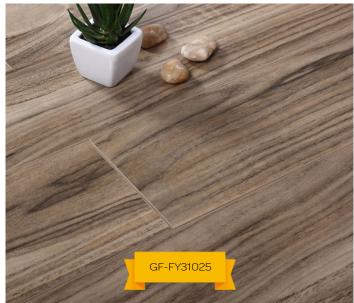


Regular specifications: 805*126*12mm (stock) 805*126*15mm (custom) 1210*194*12mm (custom) 1210*194*15mm (custom)



Regular specifications: 805*126*12mm (in stock) 805*126*15mm (in stock) 1210*194*12mm (customized) 1210*194*15mm (customized)



Regular specifications: 803*127*12mm (in stock) 803*127*15mm (in stock) 1210*194*12mm (customized) 1210*194*15mm (customized)

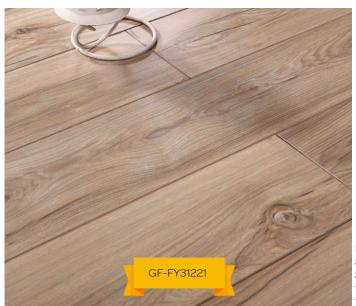

Regular specifications: 803*127*12mm (in stock) 803*127*15mm (in stock) 1210*194*12mm (customized) 1210*194*15mm (in stock)



Regular specifications: 805*126*12mm (stock) 805*126*15mm (custom) 1210*194*12mm (custom) 1210*194*15mm (custom)



Regular specifications: 805*126*12mm (in stock) 805*126*15mm (in stock) 1210*194*12mm (customized) 1210*194*15mm (customized)



Regular specifications: 805*126*12mm (custom) 805*126*15mm (custom) 1210*194*12mm (custom) 1210*194*15mm (stock)



Regular specifications: 805*126*12mm (custom) 805*126*15mm (custom) 1210*194*12mm (custom) 1210*194*15mm (custom)




Regular specifications: 805*126*12mm (stock) 805*126*15mm (custom) 1210*194*12mm (custom) 1210*194*15mm (custom)



Regular specifications: 805*126*12mm (stock) 805*126*15mm (custom) 1210*194*12mm (custom) 1210*194*15mm (custom)



Regular specifications: 805*126*12mm (stock) 805*126*15mm (custom) 1210*194*12mm (custom) 1210*194*15mm (custom)

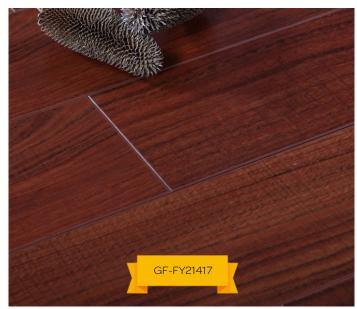

Regular specifications: 803*127*12mm (in stock) 803*127*15mm (in stock) 1210*194*12mm (customized) 1210*194*15mm (customized)



Regular specifications: 803*127*12mm (stock) 803*127*15mm (custom) 1210*194*12mm (stock) 1210*194*15mm (custom)



Regular specifications: 803*127*12mm (custom) 803*127*15mm (spot) 1210*194*12mm (custom) 1210*194*15mm (spot)



Regular specifications: 803*127*12mm (custom) 803*127*15mm (custom) 1210*194*12mm (stock) 1210*194*15mm (custom)

Laminate Flooring FLOORING



Regular specifications: 803*127*12mm (custom) 803*127*15mm (custom) 1210*194*12mm (stock) 1210*194*15mm (custom)





















Laminate Flooring FLOORING



